

Altro Walkway 20

Altro Walkway 20 is our hugely popular hard-wearing 2mm slip-resistant flooring. The range shares its palette with Altro XpressLay. This enables you to combine both ranges when you need traditionally-adhered and adhesive-free flooring in adjacent areas while maintaining a consistent look.

What's even better is Altro Walkway 20 offers you two distinct looks; traditional and modern. Both looks come with Altro Easyclean technology for superior cleanability and stain resistance.

A static-dissipative version is available, specifically designed for locations where static buildup must be avoided.

Altro Walkway 20 also looks great when paired with Altro XpressLay, Altro Aquarius, Altro Wood, Altro Orchestra or even Altro Zodiac Smooth.

Typical applications

General purpose

Features + benefits

- Hard-wearing 2mm slip-resistant flooring
- Shares palette with Altro XpressLay, allows coordination between traditionally adhered and adhesive-free slip-resistant flooring
- Matches colors with Altro Aquarius, allowing for seamless coordination from wet rooms to general areas.
- Static dissipative version available
- Achieves R10 slip resistance rating and SCoF of .78 dry, .80 wet
- FloorScore Certified / Low VOCs

Slip resistance scor









It is designers, specifiers and end-users' responsibility to ensure flooring is fit for purpose, and it's part of our role here at Altro to help make this process easy. Our flooring is separated into three categories: safety, slip-resistant and smooth.

Altro Walkway 20 is a slip-resistant flooring. It's a perfect choice for many commercial areas in which your slip risk is not as high as a commercial kitchen or other wet environments, but your patrons, patients, students and employees still deserve to be secure on their feet. Slip-resistant flooring from Altro will reduce the risk of slips, give you peace of mind and look good doing so.

Altro Easyclean



Rather than using a superficial surface coat, Altro Easyclean Technology is incorporated into the flooring while it is manufactured. This allows Altro flooring to benefit from enhanced cleaning and maintenance while still allowing our products' slip-resistant properties to shine through.

Smooth flooring will have a higher level of Altro Easyclean than a slip-resistant or safety floor.

- Industry-leading ease of cleaning
- Enhanced long-term cleanability
- Cleaning and maintenance cost savings
- Sustained long-term slip resistance
- Exceptional long-term durability
- Low dirt pick-up qualities
- Improved color retention













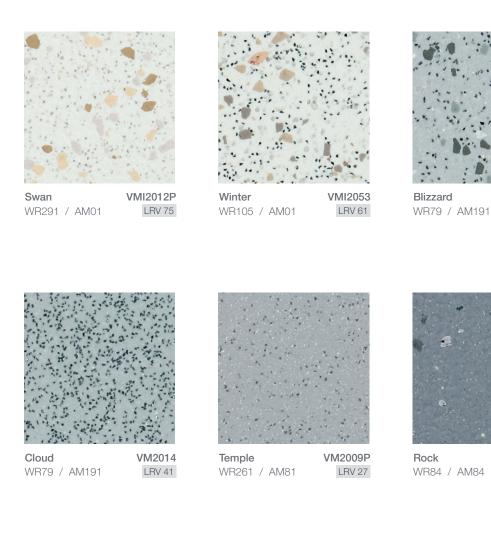





VMI2055

LRV 44






















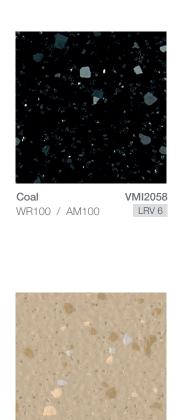



VMI2052


LRV 26

Skyline

WR52 / AM52

Tarragon

WR52 / AM52




VM20332


LRV 24

Minster

WR289 / AM265

LRV 40





Bisque

WR364 / AM335

VMI2021P


LRV 50



















Type + class		ASTM F1303	Type II, Grade 1, Class A, safety flooring	
Thickness and wear layer		2.0mm .08", homogenous construction		
Roll dimensions		6'7" x 65'5" 2m x 20m		
Weight		4.79 lbs./yd 2.6 kg/m 220 lbs. per roll		
Warranty	10 Wasr product warranty	10 years		
Life expectancy	15 year	15 years		
Cleaning technology	EASYCLEAN	Altro Easyclean		
Static coefficient of friction	.78D .80W SCOF	ASTM D2047	.78 dry, .8 wet	
Dynamic coefficient of friction	.66 DCOF	ANSI/NFSI B101.3	.66 wet DCOF	
Ramp test	R ₁₀	DIN 51130	R10	
TRRL pendulum test	PTV ≥36	BS 7976 ASTM E303	36+	
Static load limit		ASTM F970	1000 psi	
Indentation		EN 433	≤ 0.10mm	
Wear (abrasion) resistance		EN 660	≤ 10% 50,000 cycles	
Castor chair abrasion		EN 425	Pass	
Flexibility	5	ASTM F137	Pass	
Light fastness		EN 20105-B02	≥ 6	
Sound insulation	(((?)	ISO 140-8	5dB	
Electrical behaviors	₹ 2.0 kV	EN 1815	≤ 2kV Antistatic	
Surface resistivity (only for Altro Walkway 20 SD)		EN 1081	$2x10^7\Omega$	
Chemical resistance		ASTM F925	Tested	
Fire and smoke performance	8	CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450	
Minimum operating temperature		-4°F (-20°C)		
VOC emissions	floor score	CA 01350 FloorScore	Pass Certified	
Bio-based content	bis-based	Manufactured with rapidly renewable bio-based content.		
Ortho-phthalate content	anthodate\-free	Ortho-phthalate-free		
Recycled content	(Contains 10% pre-consumer + 10% post-consumer recycled content.		
Composition		rum trioxide and colored quartz aggregate throughout thickness. Silicon carbide resent on traditional "sparkly" hues. Altro Easyclean incorporated for exceptional bility.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim.			
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.			

Altro, Altro Walkway 20 and Altro Easyclean are all trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2024



Discover more of our sustainability story and credentials at altro.com







Order samples 24 hours a day at altro.com and materialbank.com



These select quick-ship colors, are heavily stocked and consistently available in our North American warehouses.

Discover more online!



Maintenance guides



Illus. cleaning guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries www.altropics.com
- Solutions by area type ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



- **USA** 800 377 5597
- © CANADA 800 565 4658
- www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information